





SES-CR

Materiál:	polyamid 12
Barvy	černá
Provozní teploty:	-40 až + 80°C
Ozubení:	vnitřní
Max. prodloužení:	370%
El. odolnost:	> 50 kV/mm
Odolnost vůči ohni	HB UL94


Použití: uvolnitelné kabelové pásky s uzamykatelným jezdcem.

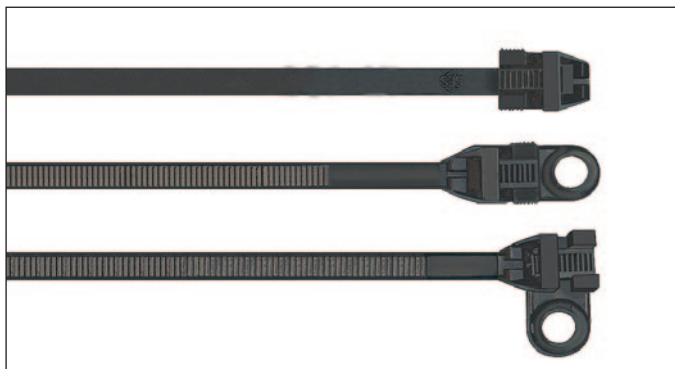

Typ	Obj. č.	Rozměry délka x šířka mm	max. svazek D mm	Min. síla DaN	
CR 50	0121 0001 010	190 x 4,8	10 ... 50	22	50
CR-D 50	0121 0002 010	200 x 4,8	10 ... 50	22	50
CR-E 50	0121 0003 010	200 x 4,8	10 ... 50	22	50
CR 100	0121 0004 010	350 x 4,8	45 ... 100	22	50


* Průměr oka: 5,5 mm

CR 50
CR 100




S hlavou - rovná

CR-D 50



S hlavou - s otvorem

CR-E 50



S 90° hlavou - s otvorem